



CAS - ALUMOSTEEL WIRE ROPES

CAS58-19F

Description

Made of aluminum-clad steel conductors, ALUMOSTEEL stranded conductor offers a technological solution for stay in power distribution and transmission lines, messenger and neutral for spacer power distribution lines (protected compact), messenger for telephony, rural electrification and lightning cable.

In relation to hot dip galvanized steel, ALUMOSTEEL stranded conductor has greater resistance to corrosion, protective aluminum layer in microns greater than a class 2 or B zinc plating, higher conductivity (13% IACS versus 8% IACS), less weight per kilometer (on average 8%), equivalent mechanical resistance, price per kilo equivalent and the same fittings.

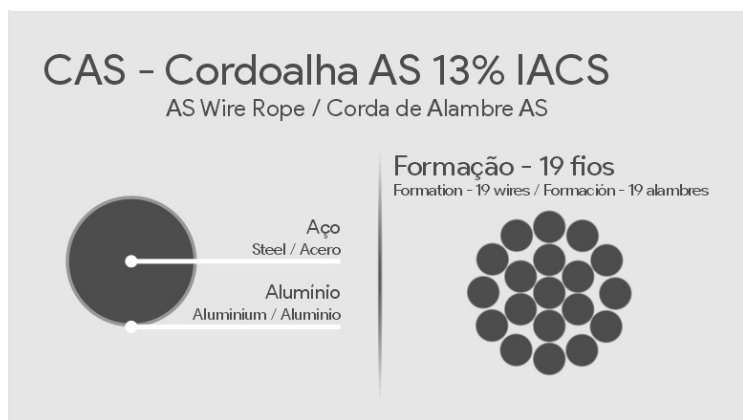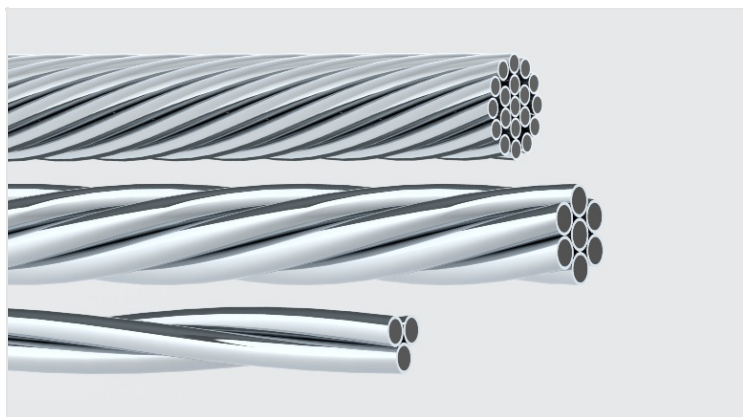

Datasheet

Código INTELLI	CAS58-19F
Diameter (inches)	5/8
Características da Cordoalha	
Diâmetro Nominal (mm)	15,87
Qtd. De Fios	19
Diâmetro dos Fios (mm)	3,18
Mechanical Characteristics	
Camada Mínima de Alumínio (µm)	84
Área do Alumínio (%)	-
Área do Aço (%)	-
Peso Nominal (kg/km)	1107,00
Módulo de Elasticidade (GPa)	-
Coef. de Dilatação Linear (1/°C)	-
Minimum Braking Load	
SM (daN)	9050
HS (daN)	14100
EHS (daN)	20180
Package	
Tipo de Bobina	-
Lance Nominal (m)	-

Massa Líq. por Bobina (kg)

-

Massa Bruta da Bobina com Fechamento (kg)

-