

CCO - COMPRESSION GROUNDING CONNECTOR

CCO-25-25


Description

Purpose: Cable to cable splice or branch. Suitable for COPPERSTEEL and copper cables.

Characteristics: Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

Material: Copper alloy, supplied with antioxidant compound INTELTROX-Cu.

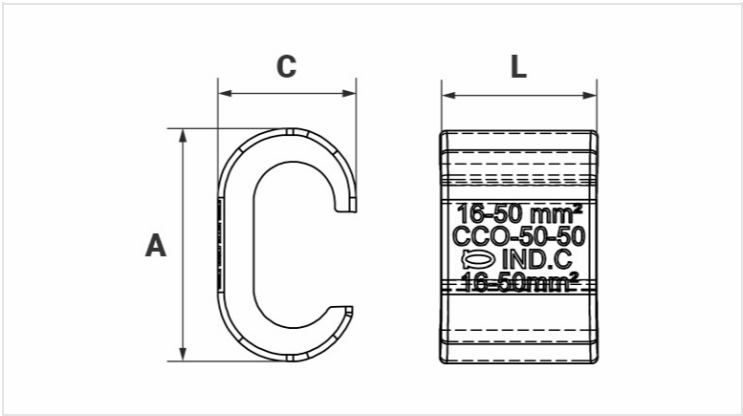

Datasheet

Conductor

Principal	
AWG/MCM	8 - 4
mm²	10 - 25
Derivação	
AWG/MCM	8 - 4
mm²	10 - 25

Application Tool

Mecânico	
Alicate	AT-60
Matriz	IW-BG
Hidráulico	
Alicate	AY-96 / CY-96
Matriz	IU-BG
Compressões	1

Dimensions (mm)

L	18,0
A	20,5
C	12,0

Package

Qtd / Emb	100
-----------	-----

