

CCO - COMPRESSION GROUNDING CONNECTOR

CCO-25-25


Description

Purpose: Cable to cable splice or branch. Suitable for COPPERSTEEL and copper cables.

Characteristics: Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

Material: Copper alloy, supplied with antioxidant compound INTELTROX-Cu.

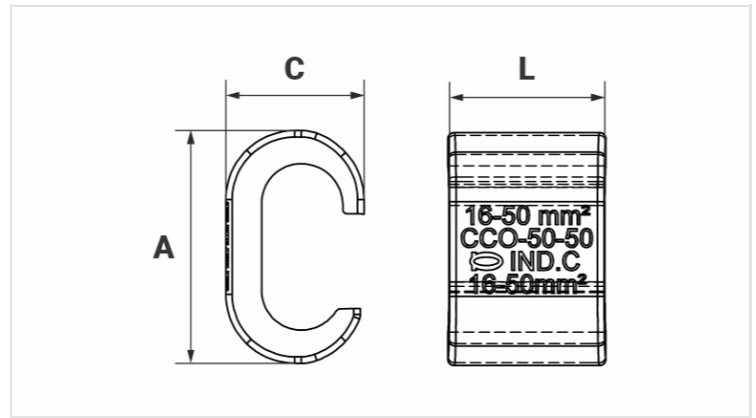

Datasheet

Conductor

Principal

AWG/MCM

8 - 4

mm²

10 - 25

Derivação

AWG/MCM

8 - 4

mm²

10 - 25

Application Tool

Mecânico

Alicate

AT-60

Matriz

IW-BG

Hidráulico

Alicate

AY-96 / CY-96

Matriz

IU-BG

Compressões

1

Dimensions (mm)

L

18,0

A

20,5

C

12,0

Package

Qtd / Emb

100

