

CCO - COMPRESSION GROUNDING CONNECTOR

CCO-50-50


Description

**Purpose:** Cable to cable splice or branch. Suitable for COPPERSTEEL and copper cables.

**Characteristics:** Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

**Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

**Material:** Copper alloy, supplied with antioxidant compound INTELTROX-Cu.

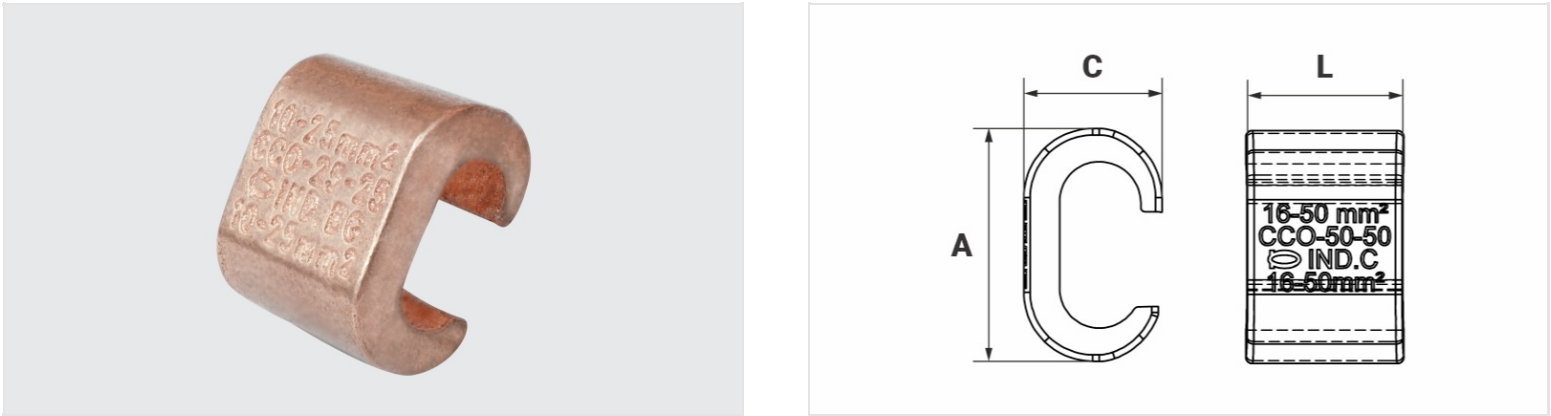

Datasheet

| Conductor        |  |               |
|------------------|--|---------------|
| Principal        |  |               |
| AWG/MCM          |  | 6 - 1/0       |
| mm²              |  | 16 - 50       |
| Derivação        |  |               |
| AWG/MCM          |  | 6 - 1/0       |
| mm²              |  | 16 - 50       |
| Application Tool |  |               |
| Mecânico         |  |               |
| Alicate          |  | -             |
| Matriz           |  | -             |
| Hidráulico       |  |               |
| Alicate          |  | AY-96 / CY-96 |
| Matriz           |  | IU-C          |
| Compressões      |  | 1             |
| Dimensions (mm)  |  |               |
| L                |  | 18,5          |
| A                |  | 28,0          |
| C                |  | 17,0          |
| Package          |  |               |
| Qtd / Emb        |  | 80            |

