

80

CCO - COMPRESSION GROUNDING CONNECTOR

CCO-50-50

Description


Purpose: Cable to cable splice or branch. Suitable for COPPERSTEEL and copper cables.

Characteristics: Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

Material: Copper alloy, supplied with antioxide compound INTELTROX-Cu.



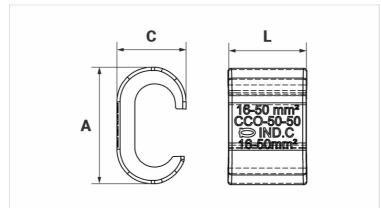

Datasheet

Qtd / Emb

Conductor	
Principal	
AWG/MCM	6 - 1/0
mm²	16 - 50
Derivação	
AWG/MCM	6 - 1/0
mm²	16 - 50
Application Tool	
Mecânico	
Alicate	-
Matriz	-
Hidráulico	
Alicate	AY-96 / CY-96
Matriz	IU-C
Compressões	1
Dimensions (mm)	
L	18,5
A	28,0
C	17,0
Package	

Peso Unit. (g) 31,20