

**CCO - COMPRESSION GROUNDING CONNECTOR**

CCO-50-50


**Description**

**Purpose:** Cable to cable splice or branch. Suitable for COPPERSTEEL and copper cables.

**Characteristics:** Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

**Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

**Material:** Copper alloy, supplied with antioxidant compound INTELTROX-Cu.

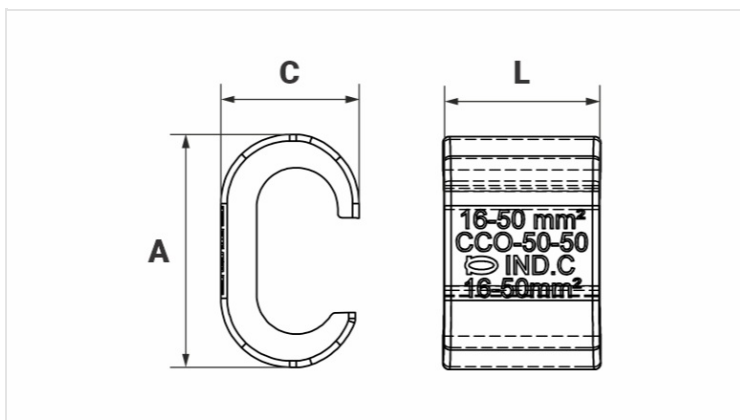

**Datasheet**

**Conductor**

Principal

AWG/MCM

6 - 1/0

mm<sup>2</sup>

16 - 50

Derivação

AWG/MCM

6 - 1/0

mm<sup>2</sup>

16 - 50

**Application Tool**

Mecânico

Alicate

-

Matriz

-

Hidráulico

Alicate

AY-96 / CY-96

Matriz

IU-C

Compressões

1

**Dimensions (mm)**

L

18,5

A

28,0

C

17,0

**Package**

Qtd / Emb

80

