

TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-70

Description


Purpose: Termination of copper conductors.

Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.

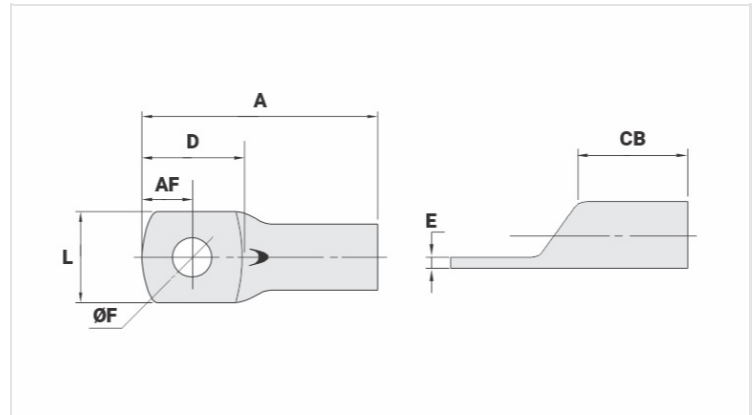

Datasheet

Conductors - Cross Section (mm²)

70

Dimensions (mm)

Diâmetro do Furo (mm)

10,5

Parafuso*

Pol.

3/8

Métrico

M10

L

20,3

A

46,0

CB

16,5

AF

10,0

D

22,0

E

3,0

Current (A)

353

Application Tool

Alicate Mecânico

Modelo

AT-60/68

Matriz (AT-60)

IW-26

Alicate Hidráulico (AY-96 / CY-96)

Matriz Circunf.

IU-26

Matriz Hexagonal

H-26

Package

Qtd / Emb

50

Peso Unit. (g)

21,70