

TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-185

Description


Purpose: Termination of copper conductors.

Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.

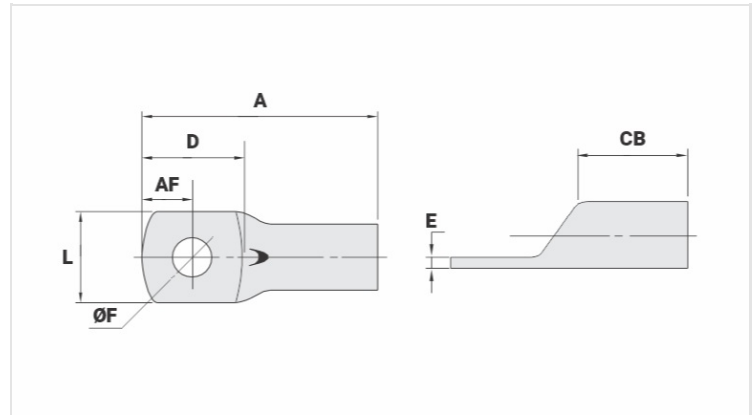

Datasheet

Conductors - Cross Section (mm²)

185

Dimensions (mm)

Diâmetro do Furo (mm)

13,8

Parafuso*

Pol.

1/2

Métrico

M12

L

32,4

A

68,5

CB

26,0

AF

13,5

D

29,5

E

3,8

Current (A)

661

Application Tool

Alicate Mecânico

Modelo

-

Matriz (AT-60)

-

Alicate Hidráulico (AY-96 / CY-96)

Matriz Circunf.

IU-31

Matriz Hexagonal

H-31

Package

Qtd / Emb

30

Peso Unit. (g)

66,00