

TF - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / SHORT BARREL)

TF-95-8

Description


Purpose: Termination of copper conductors.

Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.

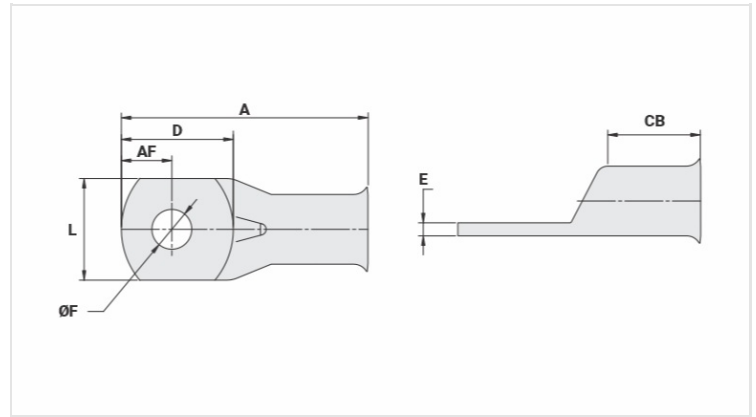

Datasheet

Conductors - Cross Section (mm²)

95

Dimensions (mm)

Diâmetro do Furo (mm)

8,5

Parafuso*

Pol.

3/8

Métrico

M10

L

24,0

A

49,0

CB

17,5

AF

10,0

D

22,0

E

3,0

Current (A)

430

Application Tool

Alicate Mecânico

Modelo

AT-60/68

Matriz (AT-60)

IW-27

Alicate Hidráulico (AY-96 / CY-96)

Matriz Circunf.

IU-27

Matriz Hexagonal

H-27

Package

Qtd / Emb

50

Peso Unit. (g)

28,50