

TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-300-L-17

Description


**Purpose:** Termination of copper conductors.

**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

**Material:** Electrolytic copper.

**Finish:** Tin Plated.

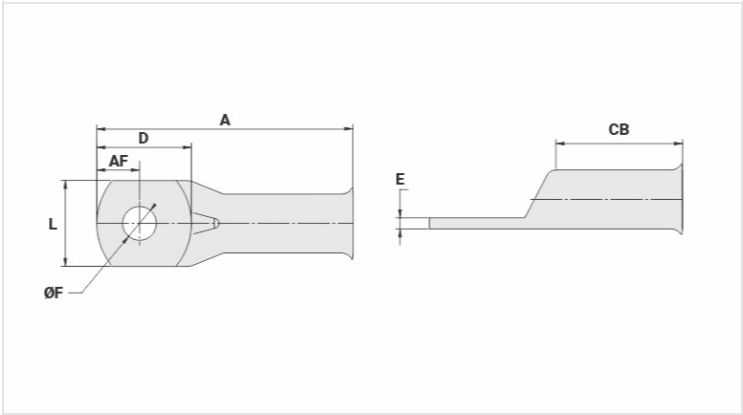

Datasheet

Conductors - Cross Section (mm²)		300
Dimensions (mm)		
Diâmetro do Furo (mm)		17,5
Parafuso*		
Pol.		1/2
Métrico		M12
L		41,5
A		103,0
CB		47,0
AF		19,0
D		40,0
E		5,0
Current (A)		902
Application Tool		
Alicate Mecânico		
Modelo		-
Matriz (AT-60)		-
Alicate Hidráulico (AY-96 / CY-96)		
Matriz Circunf.		IU-36
Matriz Hexagonal		H-36

Package	
Qtd / Emb	10
Peso Unit. (g)	166,70