


TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-500-L

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

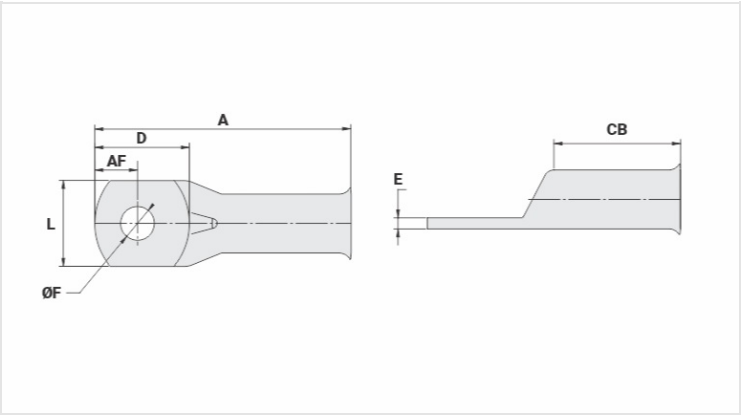

Datasheet

Conductors - Cross Section (mm²)		500
Dimensions (mm)		
Diâmetro do Furo (mm)		13,8
Parafuso*		
Pol.		1/2
Métrico		M12
L		60,0
A		129,0
CB		66,0
AF		19,0
D		42,0
E		5,1
Current (A)		1253
Application Tool		
Alicate Mecânico		
Modelo		-
Matriz (AT-60)		-
Alicate Hidráulico (AY-96 / CY-96)		
Matriz Circunf.		IU-44
Matriz Hexagonal		H-44

Package	
Qtd / Emb	8
Peso Unit. (g)	295,00