


TF-2 - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / SHORT BARREL)

TF-50-2

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

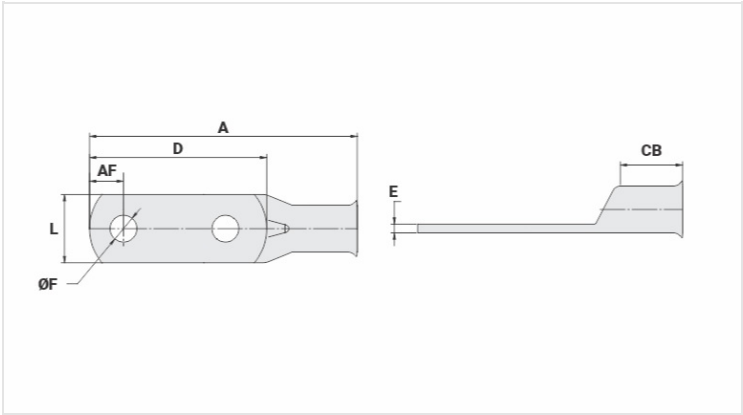

Datasheet

Conductors - Cross Section (mm²)		50
Dimensions (mm)		
Diâmetro do Furo (mm)		8,5
Parafuso*		
Pol.		5/16
Métrico		M8
L		18,0
A		63,5
CB		15,0
AF		9,0
D		42,0
E		2,7
Current (A)		275
Application Tool		
Alicate Mecânico		
Modelo		AT-60/68
Matriz (AT-60)		IW-1
Alicate Hidráulico (AY-96 / CY-96)		
Matriz Circunf.		IU-25**
Matriz Hexagonal		H-25

Package	
Qtd / Emb	50
Peso Unit. (g)	24,0