

TF-2L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / LONG BARREL)

TF-25-2L-5

Description


Purpose: Termination of copper conductors.

Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.

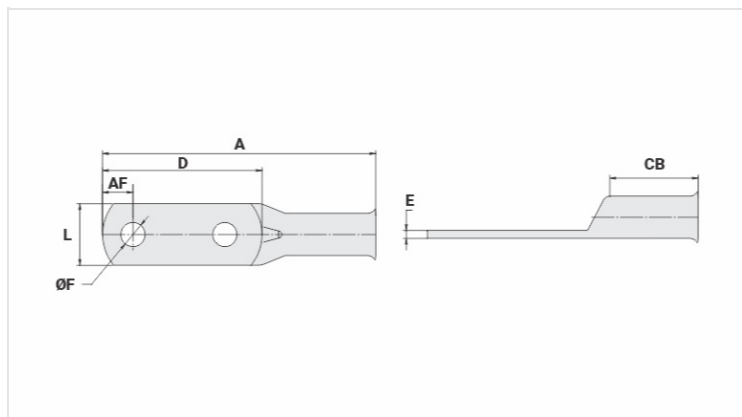

Datasheet

Conductors - Cross Section (mm²) 25

Dimensions (mm)

Diâmetro do Furo (mm)	5,2
Parafuso*	
Pol.	1/4
Métrico	M6
L	13,0
A	57,5
CB	21,0
AF	6,0
D	31,5
E	2,2

Current (A) 182

Application Tool

Alicate Mecânico	
Modelo	AT-60/68
Matriz (AT-60)	IW-4
Alicate Hidráulico (AY-96 / CY-96)	
Matriz Circunf.	IU-4
Matriz Hexagonal	H-4

Package

Qtd / Emb

50

Peso Unit. (g)

13,30