

TF-2L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / LONG BARREL)

TF-500-2L-17

Description


Purpose: Termination of copper conductors.

Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.

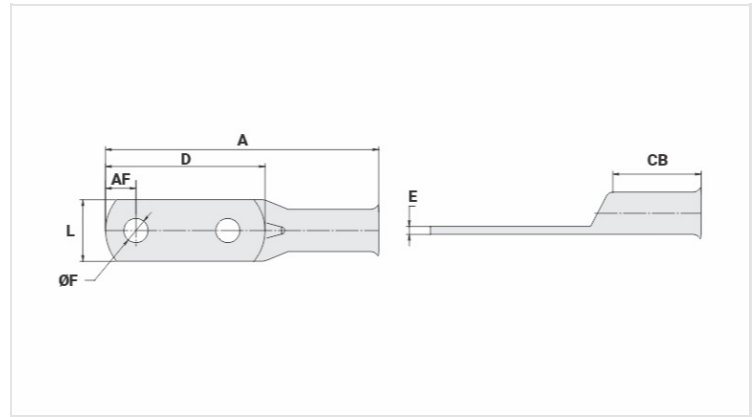

Datasheet

Conductors - Cross Section (mm²)

500

Dimensions (mm)

Diâmetro do Furo (mm)

17,5

Parafuso*

Pol.

1/2

Métrico

M12

L

172,0

A

19,0

CB

66,0

AF

19,0

D

86,4

E

5,1

Current (A)

1253

Application Tool

Alicate Mecânico

Modelo

-

Matriz (AT-60)

-

Alicate Hidráulico (AY-96 / CY-96)

Matriz Circunf.

IU-44

Matriz Hexagonal

H-44

Package

Qtd / Emb

10

Peso Unit. (g)

381,50