

TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-70-45

Description



Purpose: Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.

Characteristics: Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

Applications: Power distribution lines.

Material: Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxidant compound.

Note: For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.

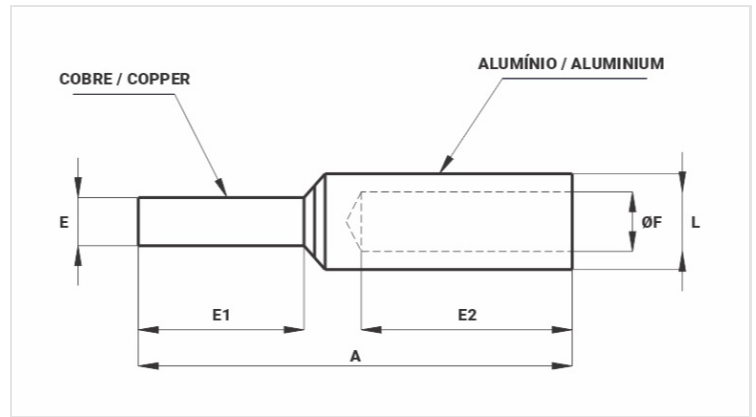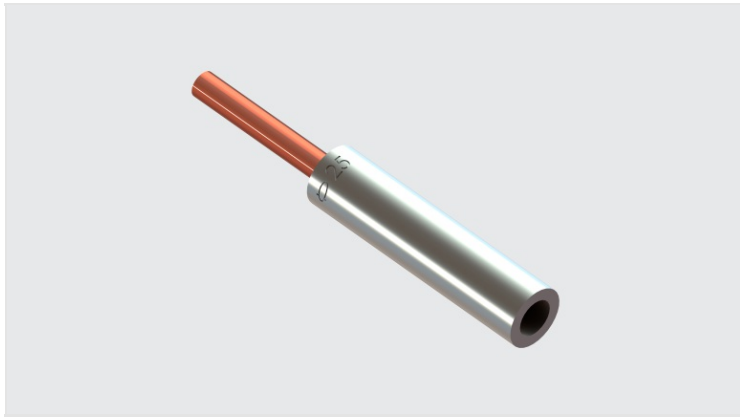

Datasheet

AAC Conductor

AWG/MCM	2/0
mm ²	70

Dimensions

L	
A	94,0
E1	45,0
E2	42,0
E	8,0
ØI	11,0

Application Tool

Alicates Mecânico (AT-60 4t)	
Matriz (IW)	245
Alicates Hidráulico (AY-96 / CY-96)	
Matriz (IU)	245
Matriz (MH)	245A

Package

Qtd / Emb	50
Peso Unit. (g)	26,4

