


TTBC - COPPER CABLE-BUSBAR TERMINAL (STRAIGHT CONNECTION)

TTBC-4-1/0-2N

Description

- Purpose:** Cable to busbar termination for copper cables.
- Characteristics:** Tightening connection. High electrical conductivity. Pad with two or four holes NEMA standard. There are lugs that lock the head of the screws.
- Application:** Power distribution lines and substations.
- Material:** Bronze terminal, fittings in copper alloy.
- Application Tool:** Star or open-ended wrench.
- Note:** The use of the antioxidant compound INTELTROX-Cu is recommended.

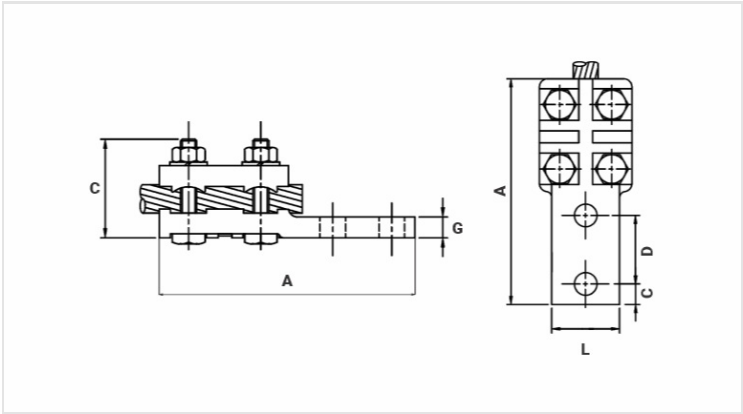

Datasheet

Conductors

Mínimo	
mm²	25
AWG/MCM	4
Máximo	
mm²	50
AWG/MCM	1/0

Dimensions

Parafuso	M10
L	32,0
A	140,0
C	45,0
D	44,5
E	16,0
G	10,0
Figura	2

Package

Qtd / Emb	10
Peso Unit. (g)	723,00

