

LB - BIMETALLIC COMPRESSION SLEEVE

LB-35-25


Description

Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxiide compound INTELTRON (aluminum side only).

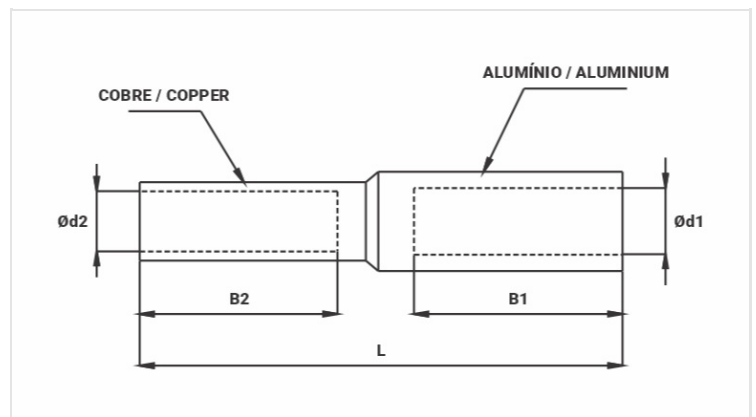

Datasheet

Aluminium Side

Conductor CA (mm ²)	35
Dimensões (mm)	
$\varnothing d1$	8,5
B1	42,0
Ferramenta de Aplicação	
AT-60	
IW	163
AY-96 / CY-96	
IU	163
MH	163A

Copper Side

Conductor Cu/CS (mm ²)	25
Dimensões (mm)	
$\varnothing d2$	7,0
E2	30,0
Ferramenta de Aplicação	
AT-60	
IW	4
AY-96 / CY-96	
IU	4

MH

4

Dimension (mm) - L

85,0

Package

Qtd / Emb

100

Peso Unit. (g)

25,20