

**LB - BIMETALLIC COMPRESSION SLEEVE**

LB-35-25


**Description**

**Purpose:** Bimetallic splice, between aluminum-copper cable (reduced traction).

**Characteristics:** Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

**Application:** Power distribution lines.

**Material:** Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

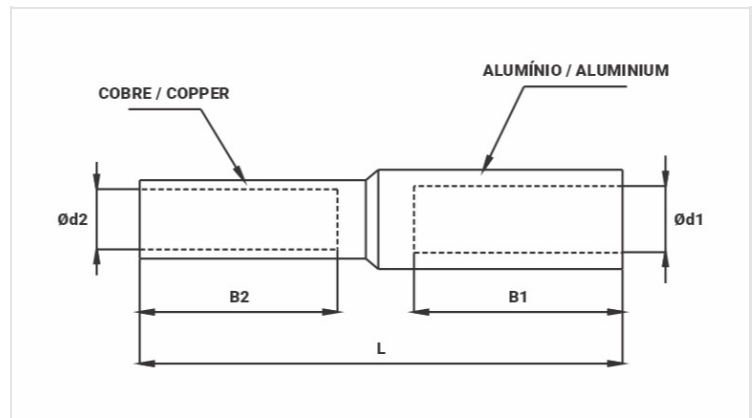

**Datasheet**

**Aluminium Side**

Conductor CA (mm <sup>2</sup> )	35
Dimensões (mm)	
Ø d1	8,5
B1	42,0
Ferramenta de Aplicação	
AT-60	
IW	163
AY-96 / CY-96	
IU	163
MH	163A

**Copper Side**

Conductor Cu/CS (mm <sup>2</sup> )	25
Dimensões (mm)	
Ø d2	7,0
E2	30,0
Ferramenta de Aplicação	
AT-60	
IW	4
AY-96 / CY-96	
IU	4

MH

4

**Dimension (mm) - L**

85,0

**Package**

Qtd / Emb

100

Peso Unit. (g)

25,20