

LB - BIMETALLIC COMPRESSION SLEEVE

LB-70-50


Description

Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxiide compound INTELTRON (aluminum side only).

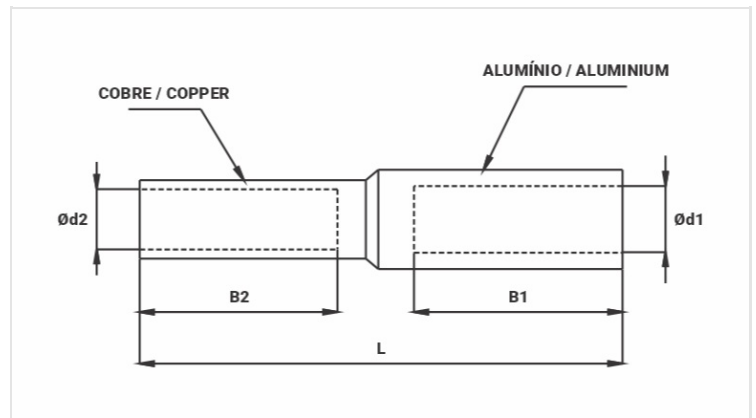

Datasheet

Aluminium Side

Condutor CA (mm ²)	70
Dimensões (mm)	
$\varnothing d1$	11,0
B1	42,0
Ferramenta de Aplicação	
AT-60	
IW	245
AY-96 / CY-96	
IU	245
MH	245A

Copper Side

Condutor Cu/CS (mm ²)	50
Dimensões (mm)	
$\varnothing d2$	9,7
E2	38,0
Ferramenta de Aplicação	
AT-60	
IW	1
AY-96 / CY-96	
IU	25

MH

25

Dimension (mm) - L

95,0

Package

Qty / Emb

50

Peso Unit. (g)

56,00