

**LB - BIMETALLIC COMPRESSION SLEEVE**

LB-70-50


**Description**

**Purpose:** Bimetallic splice, between aluminum-copper cable (reduced traction).

**Characteristics:** Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

**Application:** Power distribution lines.

**Material:** Extruded aluminum and electrolytic copper. Supplied with antioxiide compound INTELTRON (aluminum side only).

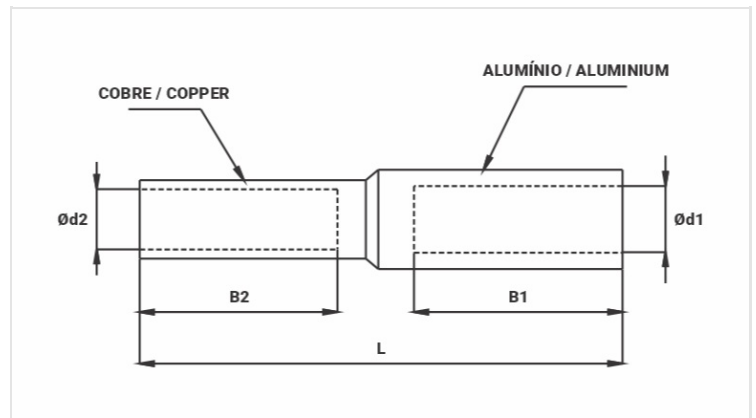

**Datasheet**

**Aluminium Side**

Conductor CA (mm <sup>2</sup> )	70
Dimensões (mm)	
Ø d1	11,0
B1	42,0
Ferramenta de Aplicação	
AT-60	
IW	245
AY-96 / CY-96	
IU	245
MH	245A

**Copper Side**

Conductor Cu/CS (mm <sup>2</sup> )	50
Dimensões (mm)	
Ø d2	9,7
E2	38,0
Ferramenta de Aplicação	
AT-60	
IW	1
AY-96 / CY-96	
IU	25

MH

25

**Dimension (mm) - L**

95,0

**Package**

Qty / Emb

50

Peso Unit. (g)

56,00