

LB - BIMETALLIC COMPRESSION SLEEVE

LB-95-70


Description

Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

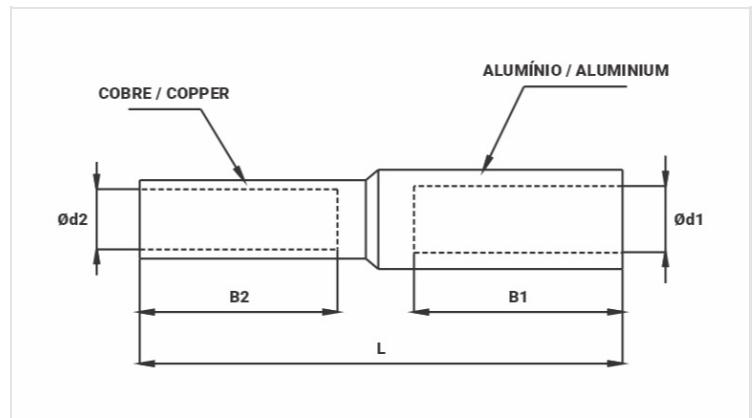

Datasheet

Aluminium Side

Conductor CA (mm ²)	95
Dimensões (mm)	
Ø d1	12,7
B1	42,0
Ferramenta de Aplicação	
AT-60	
IW	247
AY-96 / CY-96	
IU	247
MH	247A

Copper Side

Conductor Cu/CS (mm ²)	70
Dimensões (mm)	
Ø d2	11,3
E2	38,0
Ferramenta de Aplicação	
AT-60	
IW	26
AY-96 / CY-96	
IU	26

MH

26

Dimension (mm) - L

95,0

Package

Qtd / Emb

50

Peso Unit. (g)

67,50