

**LB - BIMETALLIC COMPRESSION SLEEVE**

LB-95-70


**Description**

**Purpose:** Bimetallic splice, between aluminum-copper cable (reduced traction).

**Characteristics:** Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

**Application:** Power distribution lines.

**Material:** Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

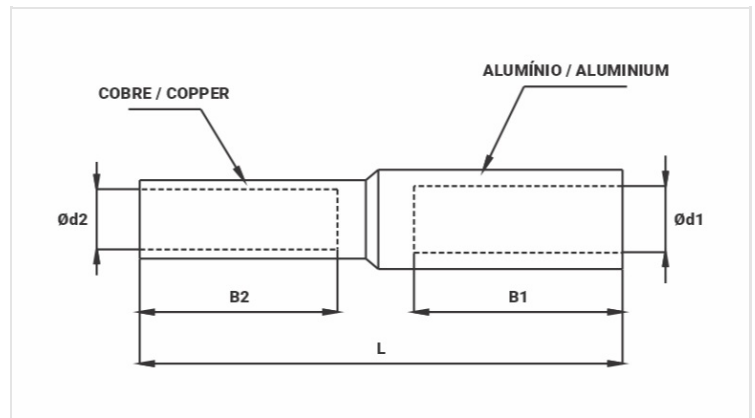

**Datasheet**

**Aluminium Side**

Condutor CA (mm <sup>2</sup> )	95
Dimensões (mm)	
Ø d1	12,7
B1	42,0
Ferramenta de Aplicação	
AT-60	
IW	247
AY-96 / CY-96	
IU	247
MH	247A

**Copper Side**

Condutor Cu/CS (mm <sup>2</sup> )	70
Dimensões (mm)	
Ø d2	11,3
E2	38,0
Ferramenta de Aplicação	
AT-60	
IW	26
AY-96 / CY-96	
IU	26

MH

26

**Dimension (mm) - L**

95,0

**Package**

Qty / Emb

50

Peso Unit. (g)

67,50