

LB - BIMETALLIC COMPRESSION SLEEVE

LB-120-95


Description

Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

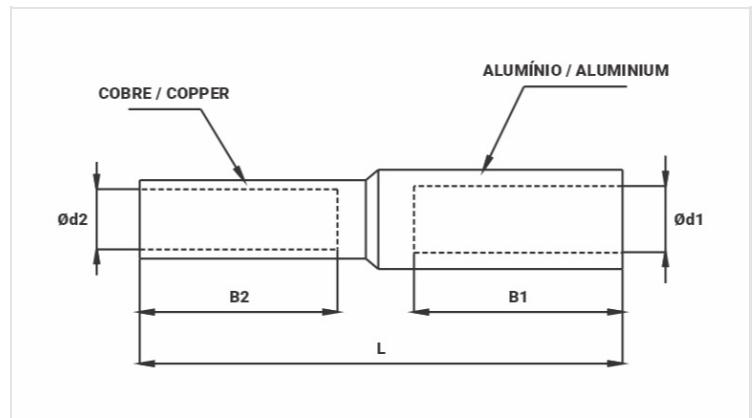

Datasheet

Aluminium Side

| | |
|--------------------------------|------|
| Condutor CA (mm ²) | 120 |
| Dimensões (mm) | |
| Ø d1 | 15,0 |
| B1 | 50,0 |
| Ferramenta de Aplicação | |
| AT-60 | |
| IW | 249 |
| AY-96 / CY-96 | |
| IU | 249 |
| MH | 249A |

Copper Side

| | |
|-----------------------------------|------|
| Condutor Cu/CS (mm ²) | 95 |
| Dimensões (mm) | |
| Ø d2 | 13,5 |
| E2 | 38,0 |
| Ferramenta de Aplicação | |
| AT-60 | |
| IW | 28 |
| AY-96 / CY-96 | |
| IU | 27 |

MH

27

Dimension (mm) - L

100,0

Package

Qty / Emb

30

Peso Unit. (g)

90,10