

LB - BIMETALLIC COMPRESSION SLEEVE

LB-120-95


Description

Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxiide compound INTELTRON (aluminum side only).

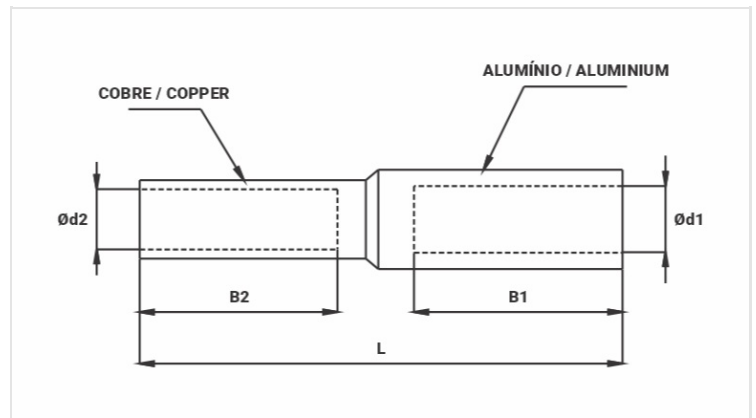

Datasheet

Aluminium Side

Condutor CA (mm ²)	120
Dimensões (mm)	
Ø d1	15,0
B1	50,0
Ferramenta de Aplicação	
AT-60	
IW	249
AY-96 / CY-96	
IU	249
MH	249A

Copper Side

Condutor Cu/CS (mm ²)	95
Dimensões (mm)	
Ø d2	13,5
E2	38,0
Ferramenta de Aplicação	
AT-60	
IW	28
AY-96 / CY-96	
IU	27

MH

27

Dimension (mm) - L

100,0

Package

Qty / Emb

30

Peso Unit. (g)

90,10