

LAR - SPLICE SLEEVE FOR ALUMINUM CABLE (FULL TRACTION)

LAR-28


Description

Purpose: Aluminum cable splice (bare or insulated network), full traction.

Characteristics: Compression connection. High electrical conductivity and resistance to corrosion. Supplied with centering guide.

Application: Power distribution lines.

Material: Extruded aluminum. Supplied with antioxidant INTELTROX.

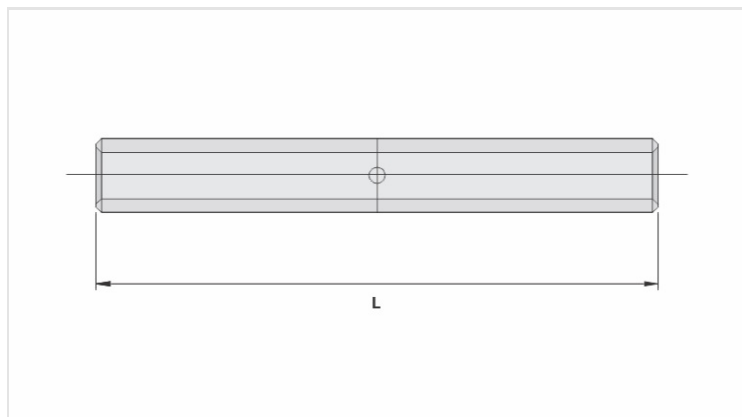

Datasheet

Conductors

CA (AWG/MCM) 6

Compacto (mm²) 16

Dimension (mm) - L 67,0

Application Tool

Alicate Mecânico (AT-60 4t)

Matriz IW-161

Compressões 8

Alicate Hidráulico (AY-96 / CY-96)

Matriz IU-161

Compressões 4

Package

Qtd / Emb 100

Peso Unit. (g) 7,60