

LAR - SPLICE SLEEVE FOR ALUMINUM CABLE (FULL TRACTION)

LAR-32


Description

Purpose: Aluminum cable splice (bare or insulated network), full traction.

Characteristics: Compression connection. High electrical conductivity and resistance to corrosion. Supplied with centering guide.

Application: Power distribution lines.

Material: Extruded aluminum. Supplied with antioxidant INTELTROX.

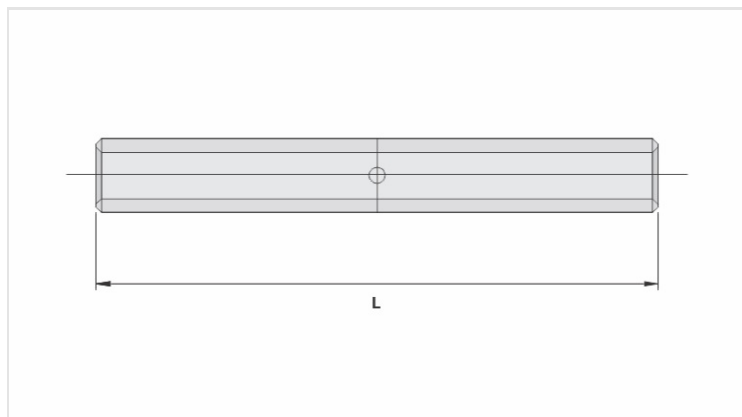

Datasheet

Conductors

CA (AWG/MCM)	4
--------------	---

Compacto (mm ²)	25
-----------------------------	----

Dimension (mm) - L	67,0
---------------------------	-------------

Application Tool

Alicate Mecânico (AT-60 4t)	
-----------------------------	--

Matriz	IW-162
--------	--------

Compressões	8
-------------	---

Alicate Hidráulico (AY-96 / CY-96)	
------------------------------------	--

Matriz	IU-162
--------	--------

Compressões	2
-------------	---

Package

Qtd / Emb	100
-----------	-----

Peso Unit. (g)	9,50
----------------	------