

TH / TH-R - GROUNDING CLAMPS

TH-34-R

Description


Purpose: Connection between ground rod and cable. Suitable for COPPERSTEEL or copper cables.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding, grounding in telecommunication networks).

Material: Bronze clamp, copper alloy (TH-R) or copper alloy clamp, electrolytic zinc plated steel fittings (TH).

Application Tool: Spanner set or open-ended wrench.

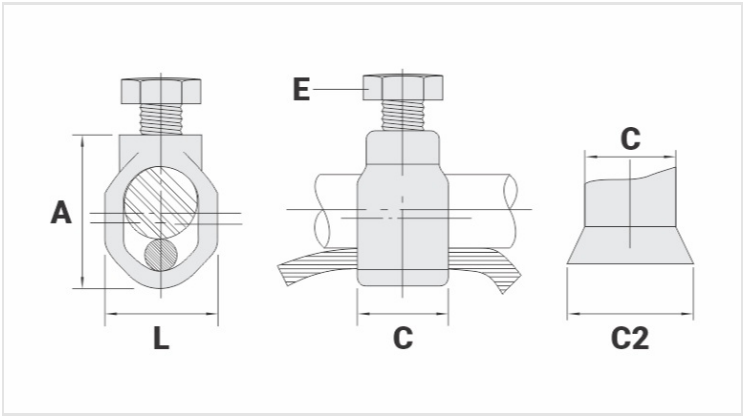

Datasheet

| | | |
|--------------------------------------|--|---------|
| Ground Rod Nominal Diameter (inches) | | 3/4" |
| Conductor | | |
| AWG/MCM | | 8 - 1/0 |
| mm² | | 10 - 50 |
| Dimensions | | |
| L | | 26,0 |
| A | | 41,5 |
| C | | 17,0 |
| C2 | | 21,0 |
| Parafuso | | M10 |
| Package | | |
| Qtd / Emb | | 40 |
| Peso Unit. (g) | | 63,10 |