

LEP - PRE-INSULATED SPLICE SLEEVE

LEP-1,5

Description

Purpose: Splice (reduced traction) of rigid or flexible copper cable.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 70°C and 750V.

Material: Electrolytic copper and insulation in rigid PVC.

Finish: Tin plated and insulated.

Application Tool: AT-10 or ATC-6.

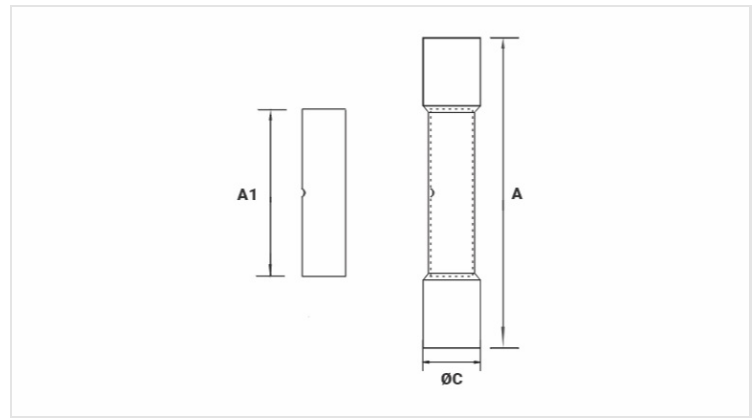

Datasheet

Insulation per DIN Standard (Color)	VERMELHO
Conductor	
AWG/MCM	22 - 16
mm ²	0,5 - 1,5
Dimensions (mm)	
L	3,5
A	27,0
A1	15,0
Maximum Current (A)	19
Package	
Qtd / Emb	100
Peso Unit. (g)	0,85