

LEP - PRE-INSULATED SPLICE SLEEVE

LEP-1,5

Description

Purpose: Splice (reduced traction) of rigid or flexible copper cable.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 70°C and 750V.

Material: Electrolytic copper and insulation in rigid PVC.

Finish: Tin plated and insulated.

Application Tool: AT-10 or ATC-6.

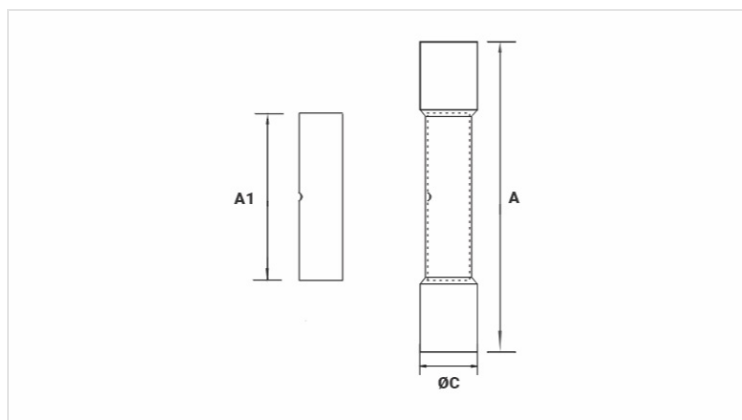

Datasheet

Insulation per DIN Standard (Color)

VERMELHO

Conductor

AWG/MCM

22 - 16

mm²

0,5 - 1,5

Dimensions (mm)

L

3,5

A

27,0

A1

15,0

Maximum Current (A)

19

Package

Qtd / Emb

100

Peso Unit. (g)

0,85