

**LEP - PRE-INSULATED SPLICE SLEEVE**

LEP-2,5

**Description**

**Purpose:** Splice (reduced traction) of rigid or flexible copper cable.


**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.

**Application:** Electrical installations in general (residential, building, industrial). Circuits up to 70°C and 750V.

**Material:** Electrolytic copper and insulation in rigid PVC.

**Finish:** Tin plated and insulated.

**Application Tool:** AT-10 or ATC-6.

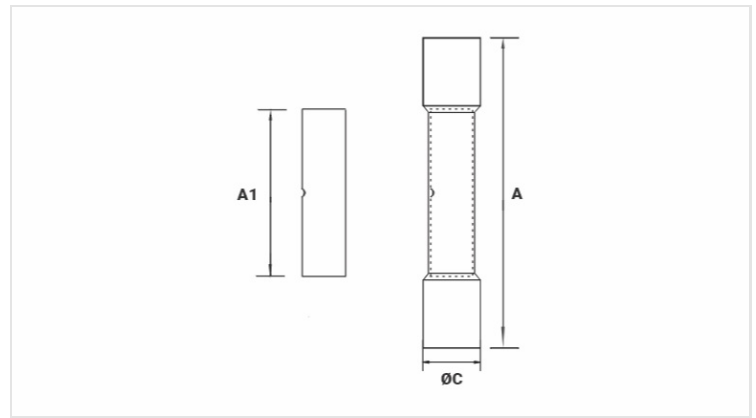

**Datasheet**

<b>Insulation per DIN Standard (Color)</b>	AZUL
<b>Conductor</b>	
AWG/MCM	16 - 14
mm <sup>2</sup>	1,5 - 2,5
<b>Dimensions (mm)</b>	
L	4,0
A	27,0
A1	15,0
<b>Maximum Current (A)</b>	27
<b>Package</b>	
Qtd / Emb	100
Peso Unit. (g)	1,00