

CAC - ALUMINUM COMPRESSION CONNECTOR

CAC-49 A 24


Description

Purpose: To aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxidant compound INTELTROX.

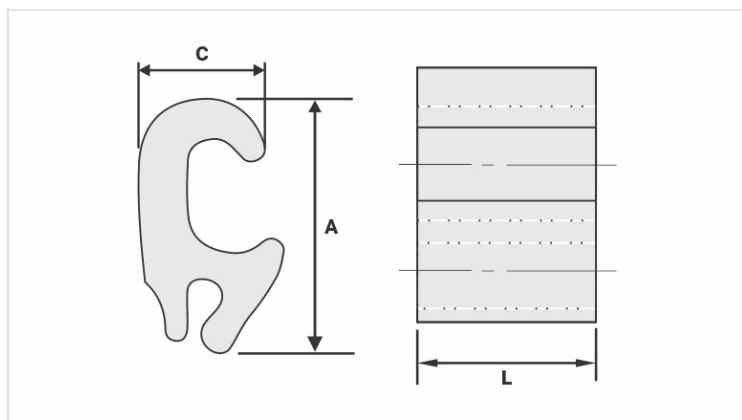

Datasheet

Conductors

Principal

CA/Cu (AWG/MCM)

Fio 1 - 2/0

CAA (AWG/MCM)

2 - 2/0

Diâmetro (mm)

7,3 - 11,3

Derivação

CA/Cu (AWG/MCM)

Fio 14 - 8

CAA (AWG/MCM)

-

Diâmetro (mm)

1,6 - 3,7

Dimensions (mm)

L

19,0

A

33,0

C

Application Tool

AT-60

Matriz

IW-O

Compressões

2

AY-96 / CY-96

Matriz

IU-O

Compressões

1

Package

Qtd / Emb

200

Peso Unit. (g)

14,80