

CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-35 A 10


Description

Purpose: Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxidant compound INTELTROX.

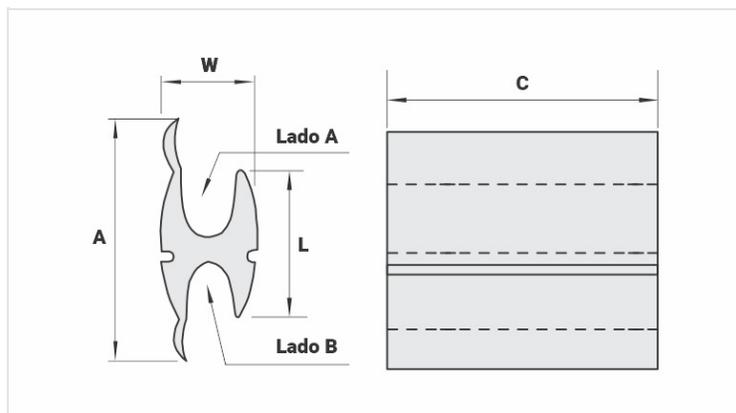

Datasheet

Conductors

Principal

CA/Cu

4 - 2 AWG | 25 - 35mm²

CAA (AWG/MCM)

2

Diâmetro (mm)

5,9 - 8,0

Derivação

CA/Cu

16 - 8 AWG | 1,5 - 10mm²

CAA (AWG/MCM)

8

Diâmetro (mm)

1,46 - 4,08

Dimensions (mm)

L

A

C

Application Tool

AT-60

Matriz

IW-O

Compressões

2

AY-96 / CY-96

Matriz

IU-O

Compressões

1

Package

Qtd / Emb

200

Peso Unit. (g)

20,00