

**CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)**

CAH-35 A 25


**Description**

**Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

**Application:** Power distribution lines.

**Material:** Extruded aluminum, Supplied with antioxidant compound INTELTROX.

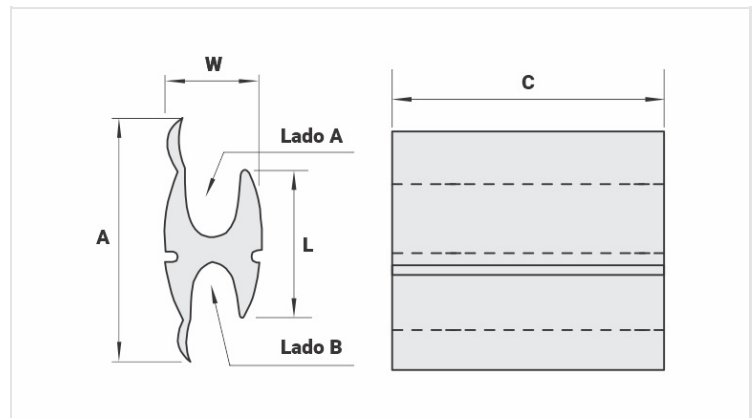

**Datasheet**

**Conductors**

Principal

CA/Cu

fio 6 - 1 AWG | 10 - 35mm<sup>2</sup>

CAA (AWG/MCM)

6 - 2

Diâmetro (mm)

4 - 8,3

Derivação

CA/Cu

fio 6 - 4 AWG | 10 - 35mm<sup>2</sup>

CAA (AWG/MCM)

6 - 4

Diâmetro (mm)

3,6 - 6,4

**Dimensions (mm)**

L

A

C

**Application Tool**

AT-60

Matriz

IW-C

Compressões

7

AY-96 / CY-96

Matriz

IU-C

Compressões

7

**Package**

Qty / Emb

100

Peso Unit. (g)

29,50