

CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-35 A 25


Description

Purpose: Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxidant compound INTELTROX.

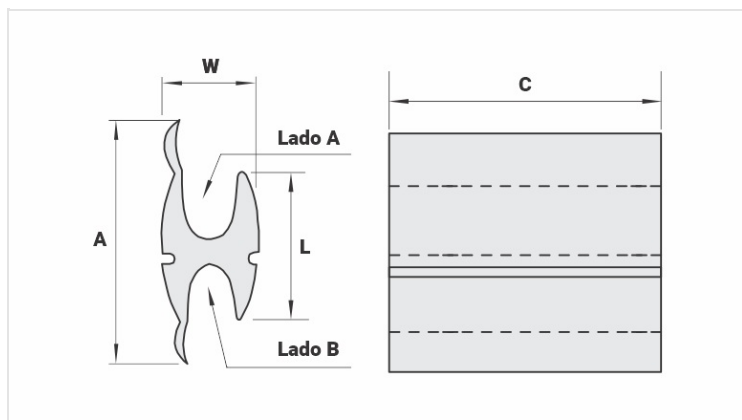

Datasheet

Conductors

Principal

CA/Cu

fio 6 - 1 AWG | 10 - 35mm²

CAA (AWG/MCM)

6 - 2

Diâmetro (mm)

4 - 8,3

Derivação

CA/Cu

fio 6 - 4 AWG | 10 - 35mm²

CAA (AWG/MCM)

6 - 4

Diâmetro (mm)

3,6 - 6,4

Dimensions (mm)

L

A

C

Application Tool

AT-60

Matriz

IW-C

Compressões

7

AY-96 / CY-96

Matriz

IU-C

Compressões

7

Package

Qtd / Emb

100

Peso Unit. (g)

29,50