

CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-70 A 35


Description

Purpose: Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxidant compound INTELTROX.

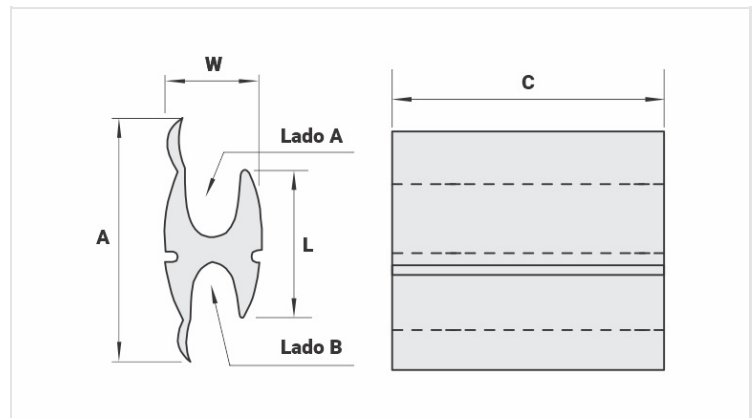

Datasheet

Conductors

Principal

CA/Cu

3 2/0 AWG | 25 - 70 mm²

CAA (AWG/MCM)

3 - 1/0

Diâmetro (mm)

5,6 - 10,7

Derivação

CA/Cu

6 - 1 AWG | 16 - 35 mm²

CAA (AWG/MCM)

6 - 2

Diâmetro (mm)

4,5 - 8,3

Dimensions (mm)

L

A

C

Application Tool

AT-60

Matriz

IW-O

Compressões

5

AY-96 / CY-96

Matriz

IU-O

Compressões

5

Package

Qtd / Emb

100

Peso Unit. (g)

40,50