

CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-240 A 70


Description

Purpose: Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxidant compound INTELTROX.

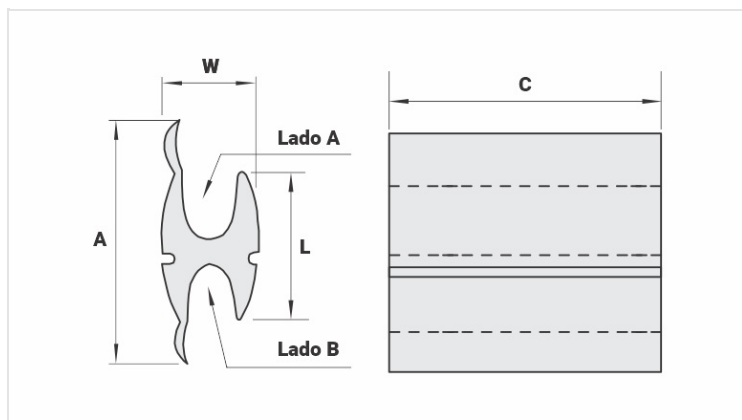

Datasheet

Conductors

Principal

CA/Cu

4/0 AWG - 500 MCM | 120 - 240mm²

CAA (AWG/MCM)

4/0 - 397,5

Diâmetro (mm)

13,2 - 20,6

Derivação

CA/Cu

6 - 3/0 AWG | 16 - 70 mm²

CAA (AWG/MCM)

6 - 2/0

Diâmetro (mm)

4,5 - 11,8

Dimensions (mm)

L

A

C

Application Tool

AT-60

Matriz

-

Compressões

-

AY-96 / CY-96

Matriz

IU-N

Compressões

2

Package

