

**GTDB2C - BUSBAR DOUBLE GROUNDING CLAMPS (2 CONDUCTORS)**

GTDB-2C-300-500

**Description**

**Purpose:** Cable to busbar connections. Suitable for COPPERSTEEL or copper cables.


**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistant. Two conductors model. Enough screw length for plate/bar thickness up to 7mm.

**Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building, industrial grounding, grounding in telecommunication networks).

**Material:** Bronze clamp, fittings in copper alloy or hot galvanized steel.

**Application Tool:** Spanner set or open-ended wrench.

\*Also available tin plated.

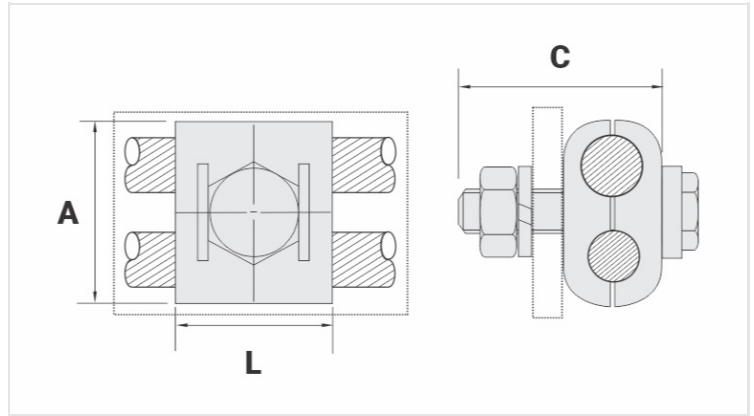

**Datasheet**

**Conductor**

Seção (AWG/MCM)	300 - 500
mm <sup>2</sup>	150 - 240

**Dimensions (mm)**

L	49,0
A	65,0
C	50,0

Parafuso - E M12

Figura 2

**Package**

Qtd / Emb	10
Peso Unit. (g)	566,00