

GTDB2C - BUSBAR DOUBLE GROUNDING CLAMPS (2 CONDUCTORS)

GTDB-2C-300-500

Description

**Purpose:** Cable to busbar connections. Suitable for COPPERSTEEL or copper cables.


**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistant. Two conductors model. Enough screw length for plate/bar thickness up to 7mm.

**Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building, industrial grounding, grounding in telecommunication networks).

**Material:** Bronze clamp, fittings in copper alloy or hot galvanized steel.

**Application Tool:** Spanner set or open-ended wrench.

\*Also available tin plated.

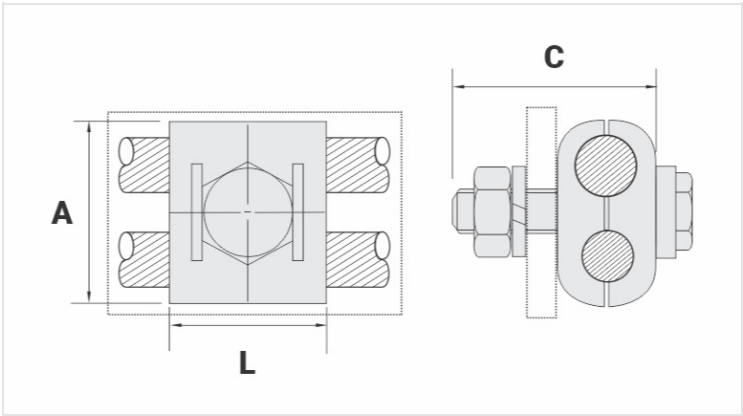

Datasheet

Conductor

Seção (AWG/MCM)	300 - 500
mm²	150 - 240

Dimensions (mm)

L	49,0
A	65,0
C	50,0
Parafuso - E	M12
Figura	2

Package

Qtd / Emb	10
Peso Unit. (g)	566,00