

## **ACB / ACH / ACB-E - STIRRUPS FOR CONNECTORS**

ACB-38-E

## **Description**


**Purpose:** Conection between CA, CAA aluminum or copper cables with wiedge, compression and hotline clamp connector.


**Characteristics:** Connection can be by tightening, compression or spring system. High electrical conductivity and corrosion resistance. Stirrups designed for perfect adaptation with connectors / clamps such as CAH, CAC, CDC, CADC, GLV, among others.

**Application:** Power distribution lines.

**Material:** Electrolytic copper.

Finish: Tin plated

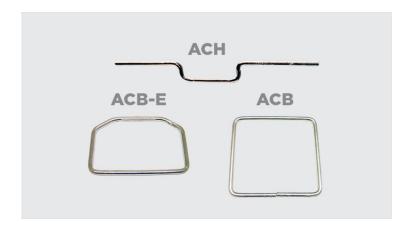

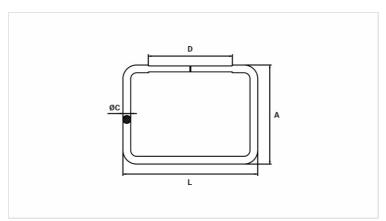

## **Datasheet**

Cross Section	
AWG/MCM	2
mm²	35
Figure	3
Dimensions	
L	131,0
A	86,0
Ø C	6,5
D	70,0
E	-
F	-
Package	
Qtd / Emb	25
Peso Unit. (g)	110,00