

CDPN - PIERCING CONNECTOR FOR BARE NETWORK

CDPN-120-35

Description


Purpose: Cables tapping. Suitable for connection to the main / trunk (bare line) and tap (insulated line). Suitable for aluminum to aluminum, aluminum to copper or copper to copper connections (low voltage up to 1kV).

Characteristics: Connection by piercing the insulation only on the tap side (there is no need to strip the cable insulation). It has a shear head nut to ensure a perfect application.

Application: OVERHEAD power distribution lines bare (run side) and insulated (tap side).

Material: Weatherproof polymer and U.V. connector, tin plated copper contacts.

Application Tool: Star or socket wrench.

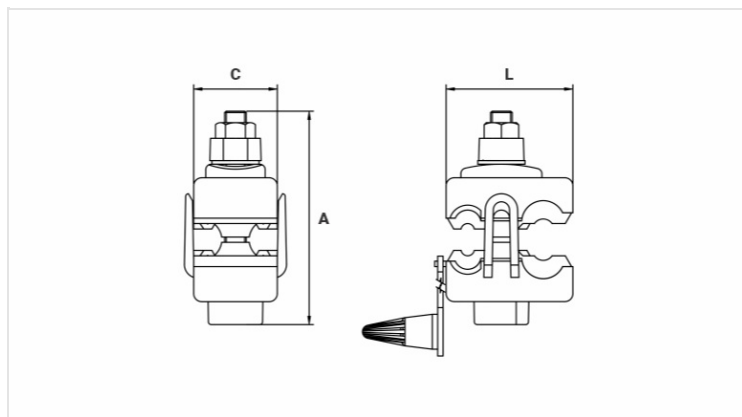

Datasheet

Conductors (AAC/Cu)

Tronco (Rede Nua)

mm² 25 - 120

AWG/MCM 4 - 4/0

Derivação (Rede Isolada)

mm² 4 - 35

AWG/MCM 12 - 2

Dimensions (mm)

L 47,0

A 72,0

C 31,0

Package

Qtd / Emb 80

Peso Unit. (g) 120,00