

**CDPN - PIERCING CONNECTOR FOR BARE NETWORK**

CDPN-120-35

**Description**


**Purpose:** Cables tapping. Suitable for connection to the main / trunk (bare line) and tap (insulated line). Suitable for aluminum to aluminum, aluminum to copper or copper to copper connections (low voltage up to 1kV).

**Characteristics:** Connection by piercing the insulation only on the tap side (there is no need to strip the cable insulation). It has a shear head nut to ensure a perfect application.

**Application:** OVERHEAD power distribution lines bare (run side) and insulated (tap side).

**Material:** Weatherproof polymer and U.V. connector, tin plated copper contacts.

**Application Tool:** Star or socket wrench.

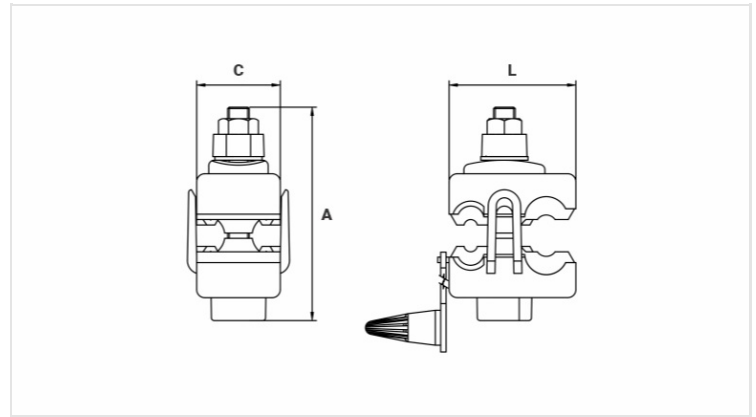

**Datasheet**

**Conductors (AAC/Cu)**

Tronco (Rede Nua)

mm<sup>2</sup> 25 - 120

AWG/MCM 4 - 4/0

Derivação (Rede Isolada)

mm<sup>2</sup> 4 - 35

AWG/MCM 12 - 2

**Dimensions (mm)**

L 47,0

A 72,0

C 31,0

**Package**

Qtd / Emb 80

Peso Unit. (g) 120,00