

PF - SPLIT BOLT CONNECTOR

PF-25

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Finish: Tin plated.

Application Tool: Box, open-ended or monkey wrenches.

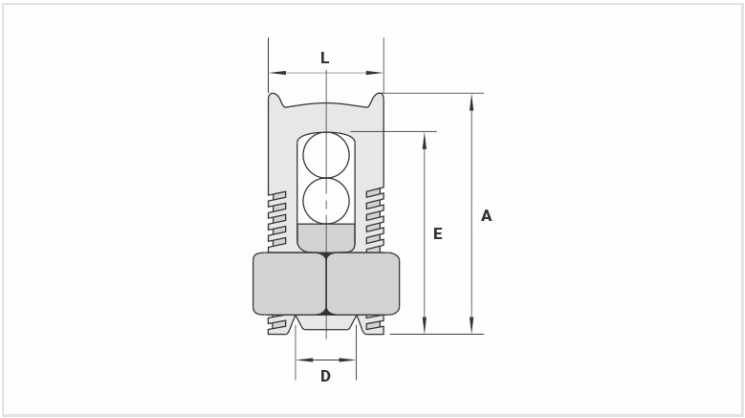

Datasheet

Conductors		
Principal (mm²)		25
Derivação (mm²)		2,5 - 25
Dimensions (mm)		
L		17,0
A		26,5
C		14,7
D		6,8
E		27,0
Package		
Qtd / Emb		50
Peso Unit. (g)		33,60