

**PF - SPLIT BOLT CONNECTOR**

PF-25

**Description**

**Purpose:** Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance.

**Application:** Power distribution network and grounding in general.

**Material:** Body in electrolytic copper. Nut and rider in copper alloy.

**Finish:** Tin plated.

**Application Tool:** Box, open-ended or monkey wrenches.

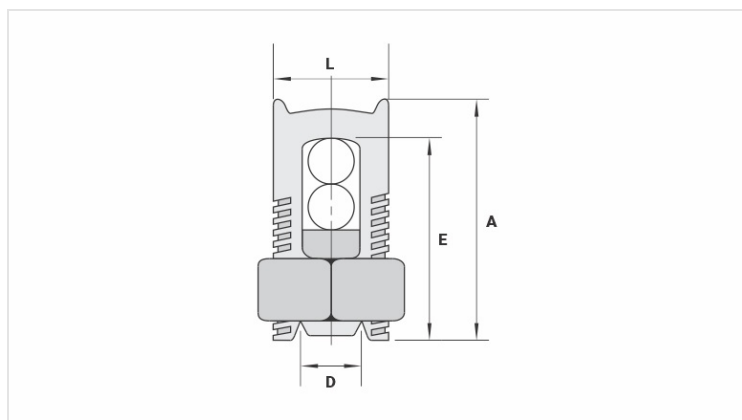

**Datasheet**

**Conductors**

Principal (mm<sup>2</sup>) 25

Derivação (mm<sup>2</sup>) 2,5 - 25

**Dimensions (mm)**

L 17,0

A 26,5

C 14,7

D 6,8

E 27,0

**Package**

Qtd / Emb 50

Peso Unit. (g) 33,60