

PF - SPLIT BOLT CONNECTOR

PF-35

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Finish: Tin plated.

Application Tool: Box, open-ended or monkey wrenches.

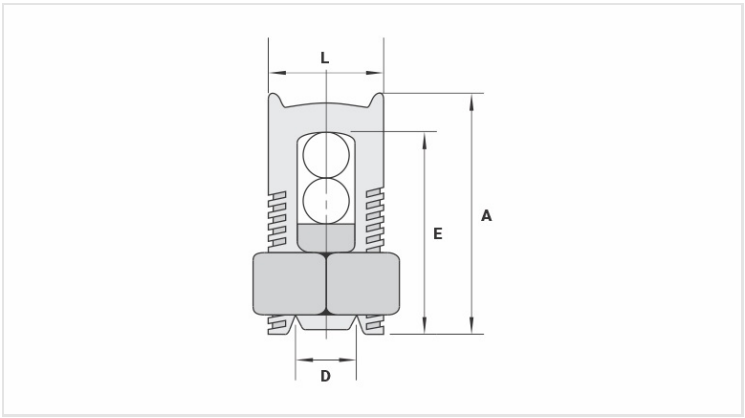

Datasheet

Conductors

Principal (mm²)	35
Derivação (mm²)	2,5 - 35

Dimensions (mm)

L	19,0
A	29,0
C	15,6
D	7,9
E	29,0

Package

Qtd / Emb	50
Peso Unit. (g)	42,00