


PF - SPLIT BOLT CONNECTOR

PF-50

Description

- Purpose:** Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.
- Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance.
- Application:** Power distribution network and grounding in general.
- Material:** Body in electrolytic copper. Nut and rider in copper alloy.
- Finish:** Tin plated.
- Application Tool:** Box, open-ended or monkey wrenches.

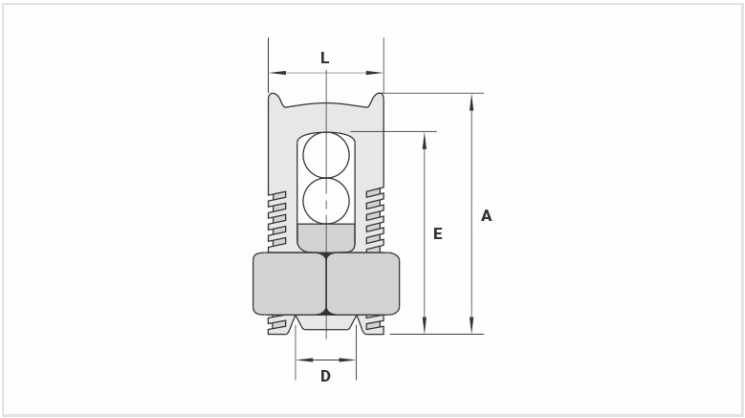

Datasheet

Conductors		
Principal (mm²)		50
Derivação (mm²)		2,5 - 50
Dimensions (mm)		
L		20,0
A		34,0
C		18,0
D		9,5
E		35,0
Package		
Qtd / Emb		30
Peso Unit. (g)		61,80