

PF - SPLIT BOLT CONNECTOR

PF-95

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Finish: Tin plated.

Application Tool: Box, open-ended or monkey wrenches.

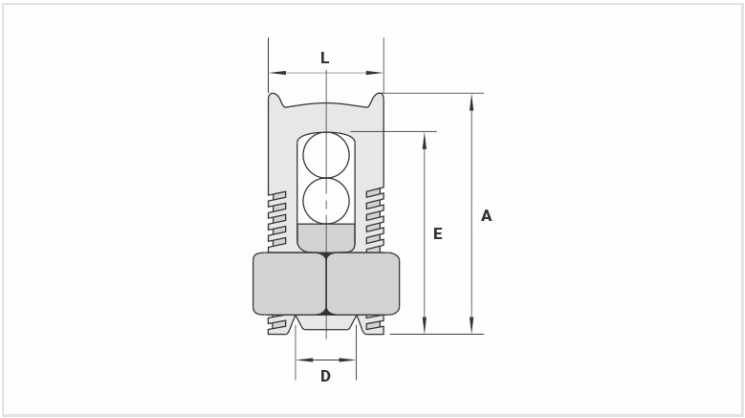

Datasheet

Conductors

Principal (mm²)	95
Derivação (mm²)	25 - 95

Dimensions (mm)

L	28,0
A	45,0
C	24,8
D	13,5
E	45,0

Package

Qtd / Emb	20
Peso Unit. (g)	136,80