

PF - SPLIT BOLT CONNECTOR

PF-185

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Finish: Tin plated.

Application Tool: Box, open-ended or monkey wrenches.

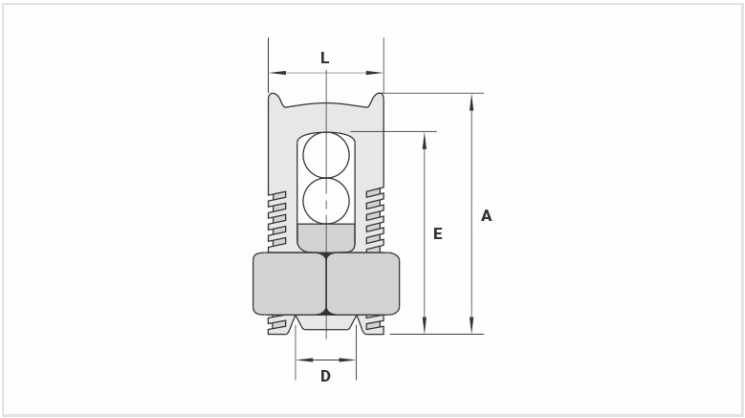

Datasheet

Conductors

Principal (mm²)	185
Derivação (mm²)	50 - 185

Dimensions (mm)

L	31,0
A	57,0
C	30,0
D	17,8
E	56,0

Package

Qtd / Emb	10
Peso Unit. (g)	238,50