

PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-16

Description

**Purpose:** Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.


**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.

**Application:** Power distribution lines and grounding in general.

**Material:** Body in eletrolytic copper, nut, rider and spacer in copper alloy.

**Finish:** Tin plated.

**Application Tool:** Box open-ended or monkey wrenches.

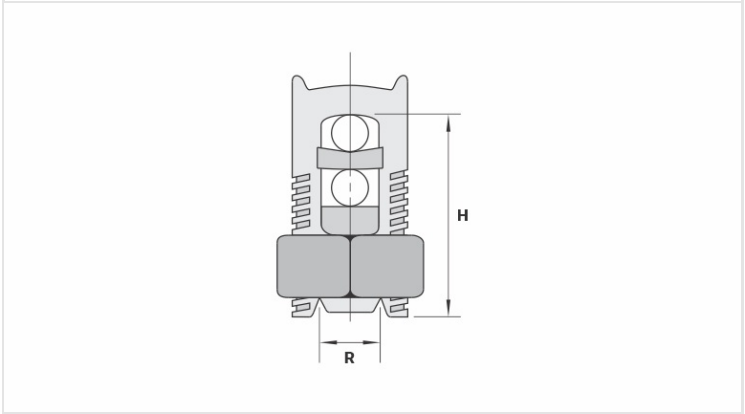

Datasheet

Conductors

Principal (mm²)	16
Derivação (mm²)	2,5 - 16

Dimensions (mm)

L	
A	
C	
D	
E	

Package

Qtd / Emb	50
Peso Unit. (g)	29,10