

PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-95

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.

Application: Power distribution lines and grounding in general.

Material: Body in eletrolytic copper, nut, rider and spacer in copper alloy.

Finish: Tin plated.

Application Tool: Box open-ended or monkey wrenches.

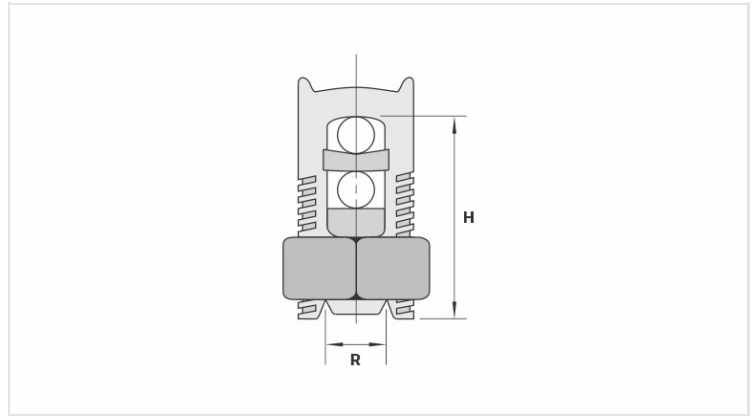

Datasheet

Conductors

Principal (mm ²)	95
------------------------------	----

Derivação (mm ²)	10 - 95
------------------------------	---------

Dimensions (mm)

L

A

C

D

E

Package

Qtd / Emb	20
-----------	----

Peso Unit. (g)	161,80
----------------	--------