


ICAL-CAA/RA - ALUMINIUM CONDUCTORS WITH ALUMINIUM CLAD STEEL CORE (ACSR/AW)

ICAL-2-CAA/RA-SPARROW

Description

ACSR/AW is suitable for energy transmission in urban and rural overhead lines. The CAA/RA aluminum cable is an aluminum conductor, alloy 1350 (H19 temper) stranded (class 2), concentric with an aluminum coated steel core ALUMOSTEEL, which ensures greater mechanical performance compared to bare aluminum cables and higher resistance to corrosion compared to cables with zinc plated steel core.

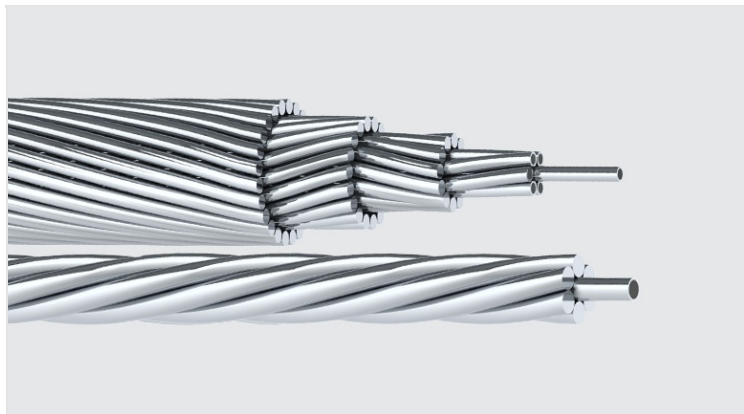

Datasheet

| | |
|---|----------|
| International Code | Sparrow |
| Cross Section (AWG/MCM) | 2 |
| Area | |
| Al (mm ²) | 33,590 |
| Aço (mm ²) | 5,600 |
| Total (mm ²) | 39,190 |
| Formation | |
| Al (fios/Ømm) | 6 x 2,67 |
| Aço (fios/Ømm) | 1 x 2,67 |
| Nominal Diameter of Steel Core (mm) | |
| Nominal Diameter of Cable (mm) | 8,01 |
| Nominal Mass | |
| Al (kg/km) | 92 |
| Aço (kg/km) | 37 |
| Total (kg/km) | 129 |
| Breaking Load (kN / kgf) | 12,26 |
| Maximum Resistance to 20°C in DC (ohms/km) | 0,8085 |
| Modulus of Elasticity to 20°C Final (Mpa) | |
| Coef. of Linear Thermal Expansion (1/°C) | |
| Ampacity (A) | |
| Characteristics of Aluminium Wires | |
| Seção Nominal (mm ²) | |
| Condutividade Mínima (%IACS) | |

Resistência à Tração Média - Mín. (MPa)

Along. à Ruptura Média Mín. (%)

Characteristics of Aluminium-Steel Wires

Seção Nominal (mm²)

Condutividade Mínima - 20°C (%IACS)

Resistividade Máxima - 20°C (ohms.mm²/km)

Resist. à Tração Média - Mín. (MPa)

Resist. à Tração a 1% de Alongamento (MPa)

Along. à Ruptura Média Mín. (%)

Package

Tipo de Bobina

Lance Nominal (m)

Massa Líq. por Bobina (kg)

Massa Bruta da Bobina com Fechamento (kg)